

# Technical Data Sheet

## A/GLUE-50g-C, A/GLUE-10g-C

Revision: EN005.1  
Revision Date: Nov. 2022

### PRODUCT DESCRIPTION

MXBON® 12638 is designed for the bonding of cylindrical fitting parts. The product is a green color, high viscous single component acrylic based material. The product could replace traditional bolts or fittings because of its easy assembling process, high efficiency and the quality. It not only uses on active metals but also passive metals surface such as stainless steel. The product cures in the absence of air, the product can be further accelerated by the use of Activator 017649.

<b>Technology</b>	Acrylic
<b>Chemical Type</b>	Dimethacrylate ester
<b>Appearance (uncured)</b>	Green liquid
<b>Fluorescence</b>	Positive under UV light
<b>Components</b>	One component – requires no mixing
<b>Viscosity</b>	High
<b>Cure</b>	Anaerobic
<b>Secondary Cure</b>	Activator
<b>Application</b>	Retaining
<b>Strength</b>	High

### NSF International

Registered to NSF Category S5 for use as a retaining compounds where there is no possibility of food contact in and around food processing areas. Note: This is a regional approval. Please contact your local Technical Service Center for more information and clarification.

### DVGW

Registered to DVGW greasing and sealing materials for metallic threaded joints in gas appliances, gas equipment and water heating equipments, not allowed in the gas installation according to DVGW-TRGI 2008. Note: This is a regional approval. Please contact your local Technical Service Center for more information and clarification.


### TYPICAL PROPERTIES OF UNCURED MATERIAL

<b>Specific Gravity @ 25 °C</b>	1.1
<b>Flash Point -</b>	See SDS
<b>Viscosity, Brookfield - RVT, 25 °C, mPa·s (cP)</b>	
<b>Spindle 3, 20 rpm</b>	2,000 to 3,000
<b>Shelf life</b>	24 months unopened when stored at 8 to 24°C

### TYPICAL CURING PERFORMANCE


#### Cure Speed vs. Substrate

The rate of cure will depend on the substrate used. The graph below shows the shear strength developed with time on steel pins and collars compared to different materials and tested according to ISO 10123.

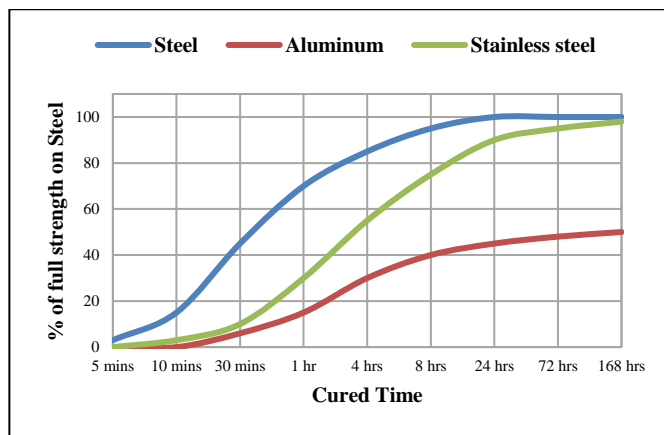

#### Cure Speed vs. Bond Gap


The rate of cure will depend on the bondline gap. The following graph shows shear strength developed with time on steel pins and collars at different controlled gaps and tested according to ISO 10123.

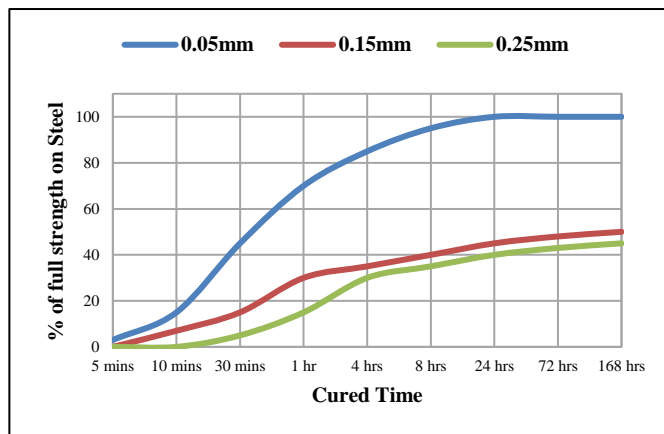

#### Cure Speed vs. Temperature

The rate of cure will depend on the temperature. The graph below shows the shear strength developed with time at different temperatures on steel pins and collars and tested according to ISO 10123.

# Technical Data Sheet MXBON®

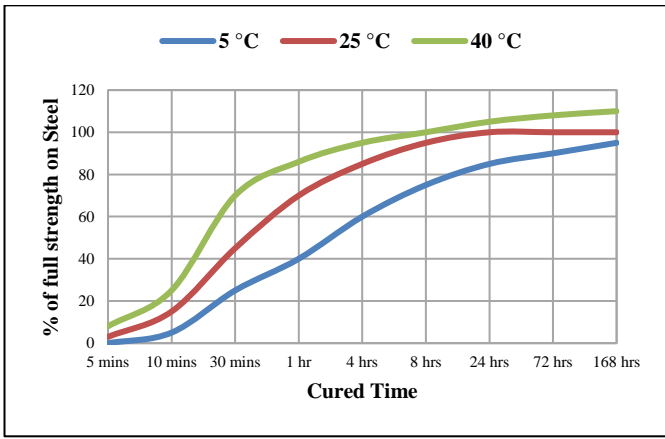

After 24 hours @ 25 °C

Compressive Shear Strength, ISO 10123:

	N/mm <sup>2</sup>	psi
Steel pins and collars	≥ 25	3,625

## TYPICAL ENVIRONMENTAL RESISTANCE


Cured for 1 week @ 25 °C

Compressive Shear Strength, ISO 10123

Steel pins and collars


## Heat Aging

Aged at temperature indicated and tested @25 °C

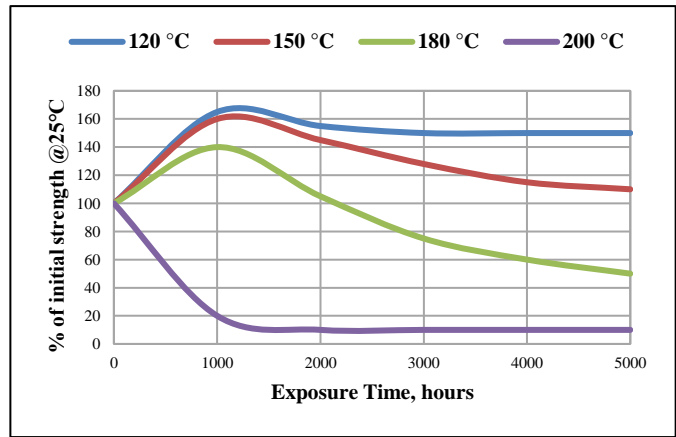

## Cure Speed vs. Activator

Where cure speed is unacceptably long, or large gaps are present, applying activator to the surface will improve cure speed. The graph below shows the shear strength developed with time on steel pins and collars using Activator 017649 and tested according to ISO 10123.

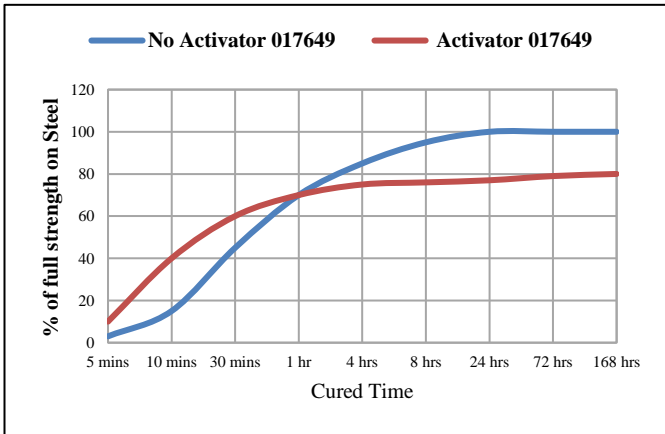

## Chemical/Solvent Resistance

Aged under conditions indicated and tested @25 °C

Environment	°C	% of initial strength			
		500 h	1000h	3000h	5000h
Unleaded Petrol	25	100	95	95	90
Water/ethylene glycol 50/50	87	105	105	100	95
IPA	25	100	95	95	90
Acetone	25	100	100	95	95

## TYPICAL PERFORMANCE OF CURED MATERIAL

### Adhesive Properties - Torque

Cured for 24 hrs @ 25 °C

Breakaway Torque, ISO 10964:

Bonding Identical Substrate	N.m	lb.in.
M10 steel nuts and bolts	37	326

Prevail Torque, ISO 10964:

Bonding Identical Substrate	N.m	lb.in.
M10 steel nuts and bolts	34	299

### Adhesive Properties - Shear Strength

After 15 minutes @ 25 °C

Compressive Shear Strength, ISO 10123:

	N/mm <sup>2</sup>	psi
Steel pins and collars	≥ 13.5	1,958

Stainless steel pins and collars

Environment	°C	% of initial strength			
		500 h	1000h	3000h	5000h
Sodium Hydroxide, 20%	25	95	75	60	50
Phosphoric Acid, 10%	25	95	65	40	35

## **GENERAL INFORMATION**

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be used with chlorine or other strong oxidizing materials. Where washing systems are used to clean the surfaces before bonding, it is important to check the compatibility of the washing solution with the adhesive. In some cases, these solutions can affect the cure and performance of the adhesive. This product is not recommended for use on certain plastics. Users are recommended to confirm compatibility of the product with such substrates.

## **Storage & Handling precaution**

Keep adhesive in a cool and dry place. The storage temperature is recommended at 8 °C to 24 °C. For details, consult the Safety Data Sheet, (SDS). Shelf life is two years from the date of manufacture in the original container under the optimal conditions.

1. Avoid contact with skin and eyes.
2. If contact with skin, rinse with water.
3. If adhesive gets into eye, keep eye open and rinse with water thoroughly. Seek medical attention immediately.
4. Keep the material out of children's reach.

## **Directions for use**

For assembly

1. The substrate surfaces must be clean and free of grease.
2. Shake the product thoroughly before use.
3. If the cure speed is too slow, consider using activator.
4. Apply several drops to the nut & bolt.
5. Assemble and tighten as required.
6. To prevent the clogging of the bottle nozzle, do not let the tip touch the metal surfaces during application.

For disassembly & cleanup

1. Use localized heat (250 °C) to nut and bolt, disassemble while hot.
2. Use a wire brush to clean the charred product.

## **Note**

The data contained herein are furnished for informational purposes only and are believed to be reliable. However, Cartell Chemical Co., Ltd does not assume responsibility for any results obtained by persons over whose methods Cartell Chemical Co., Ltd has no control. It is the user's responsibility to determine the suitability of Cartell Chemical Co., Ltd's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Cartell Chemical Co., Ltd's products. Cartell Chemical Co., Ltd specifically disclaims all warranties express or implied, including warranties of merchantability or suitability for a particular purpose arising from sale or use of Cartell Chemical Co., Ltd's products. Cartell Chemical Co., Ltd further disclaims any liability for consequential or incremental damages of any kind including lost profits.