

Gerade Einschraubverschraubungen

Straight Connectors, Male



AL

Einschraubgewinde: Whitworth-Rohrgewinde -
zylindrisch

Abdichtung durch Dichtkante Form B

Stud thread: BSP thread - parallel

Sealing by stud face form B

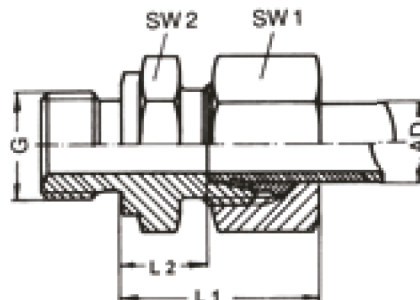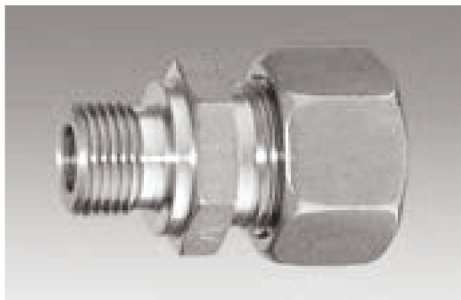

Reihe / Series	PN	AD	G	L1	L2	SW1	SW2	kg/100
L	315	6 #	G 1/8 A	23,0	8,5	14	14	2,5
L	315	6	G 1/4 A	24,5	10,0	14	19	4,0
L	315	6	G 3/8 A	26,0	11,5	14	22	5,8
L	315	6	G 1/2 A	26,5	12,0	14	27	10,0
L	315	8	G 1/8 A	23,5	8,5	17	14	3,2
L	315	8 #	G 1/4 A	25,0	10,0	17	19	4,3
L	315	8	G 3/8 A	26,0	11,5	17	22	5,9
L	315	8	G 1/2 A	26,5	12,0	17	27	9,9
L	315	10	G 1/8 A	26,5	11,5	19	17	4,3
L	315	10 #	G 1/4 A	26,0	12,0	19	19	5,0
L	315	10	G 3/8 A	27,5	12,5	19	22	6,4
L	315	10	G 1/2 A	29,0	14,0	19	27	10,2
L	315	12	G 1/8 A	29,5	10,5	22	19	5,8
L	315	12	G 1/4 A	26,0	11,0	22	19	6,2
L	315	12 #	G 3/8 A	27,5	12,5	22	22	7,0
L	315	12	G 1/2 A	28,0	13,0	22	27	10,1
L	315	12	G 3/4 A	31,0	12,0	22	32	10,4
L	315	15	G 1/4 A	28,0	13,0	27	24	9,8
L	315	15	G 3/8 A	28,5	13,5	27	24	10,2
L	315	15 #	G 1/2 A	29,0	14,0	27	27	11,4
L	315	15	G 3/4 A	30,0	15,0	27	32	17,2
L	315	18	G 3/8 A	31,0	14,5	32	27	13,6
L	315	18 #	G 1/2 A	31,0	14,5	32	27	14,2
L	315	18	G 3/4 A	31,0	14,5	32	32	18,5

Reihe / Series	PN	AD	G	L1	L2	SW1	SW2	kg/100
L	160	22	G 3/8 A	30,0	16,0	36	32	18,0
L	160	22	G 1/2 A	33,0	16,5	36	32	20,0
L	160	22 #	G 3/4 A	33,0	16,5	36	32	19,6
L	160	22	G 1 A	34,0	17,5	36	41	28,9
L	160	22	G 1 1/4 A	34,0	17,5	36	50	*)
L	160	28	G 1/2 A	33,0	17,5	41	41	21,0
L	160	28	G 3/4 A	33,0	17,5	41	41	23,0
L	160	28 #	G 1 A	34,0	17,5	41	41	27,0
L	160	28	G 1 1/4 A	35,0	18,5	41	50	24,7
L	160	35	G 1/2 A	37,0	17,5	50	46	*)
L	160	35	G 3/4 A	38,0	17,5	50	46	*)
L	160	35	G 1 A	38,0	17,5	50	46	*)
L	160	35 #	G 1 1/4 A	39,0	17,5	50	50	46,5
L	160	35	G 1 1/2 A	41,0	19,5	50	55	*)
L	160	42	G 1 A	39,0	16,0	60	55	*)
L	160	42	G 1 1/4 A	40,0	19,0	60	55	*)
L	160	42 #	G 1 1/2 A	42,0	19,0	60	55	61,0

Baumaße sind Ungefähurmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

#) entspricht Reihe nach DIN 2353

#) according to series DIN 2353

*) auf Anfrage

*) on request