



GaIL

Innengewinde: Whitworth-Rohrgewinde - zylindrisch

Female thread: BSP thread - parallel

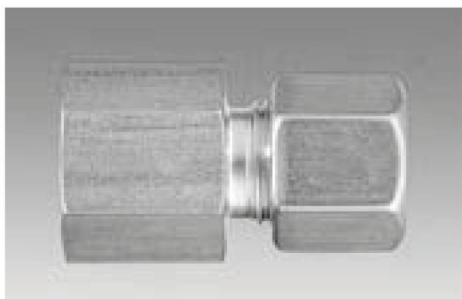

Reihe / Series	PN	AD	G	L1	L2	SW1	SW2	kg/100
L	315	6	G 1/8	34	19,0	14	14	2,7
L	315	6	G 1/4	39	24,0	14	19	*)
L	315	8	G 1/4	39	24,0	17	19	5,0
L	315	8	G 3/8	40	25,0	17	22	*)
L	315	8	G 1/2	42	28,0	17	27	*)
L	315	10	G 1/4	40	25,0	19	19	6,0
L	315	10	G 3/8	41	26,0	19	22	*)
L	315	10	G 1/2	41	26,0	19	27	*)
L	315	12	G 1/4	40	25,0	22	19	*)
L	315	12	G 3/8	41	26,0	22	22	8,8
L	315	12	G 1/2	46	29,0	22	27	*)
L	315	15	G 3/8	42	27,0	27	24	*)
L	315	15	G 1/2	46	31,0	27	27	11,3
L	315	18	G 3/8	44	27,5	32	27	*)
L	315	18	G 1/2	47	30,5	32	27	15,1
L	160	22	G 3/4	52	35,5	36	36	27,0
L	160	28	G 1	55	38,0	41	41	31,1
L	160	35	G 1 1/4	63	41,0	50	55	58,8
L	160	42	G 1 1/2	65	42,5	60	60	76,0

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

*) auf Anfrage

*) on request